




by Parallax Group Inc.

Ph: 1-800-443-4859

### Interior Layout

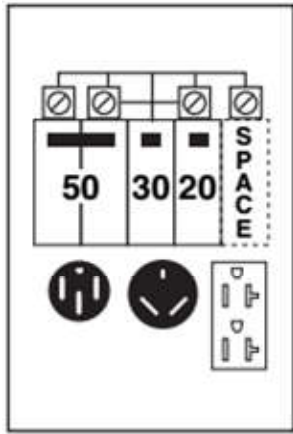


14-50R BR32U 5-20R2GFI

E

U075CTL010

### Knockout Configuration

(FIG. 2)



B = 1", 1-1/4", 1-1/2"


G = 1/2", 3/4", 1"

D = 3/4", 1", 1-1/4"



### Cabinet Dimensions

(FIG. A)



# Power Outlet Panel Model U075CTL010

- 50 ampere type 14-50R receptacle.
- 30 ampere type BR32U receptacle.
- 20 ampere type 5-20R2GFI convenience receptacle.
- 2-pole CB250, 1-pole CB130, 1-pole CB120, Space CB120 circuit breakers.
- NEMA 3R enclosure.
- Loop Feed Lugs.

### Wire Range

TABLE W

Connector	Copper		Aluminum	
	Solid	Strand	Solid	Strand
Line (Loop Feed)	14-8	14-1/0	12-8	12-1/0
Load	14-10	14-10	----	----
Neutral <small>Large Hole</small>	12-8	12-1/0	10-8	10-1/0
Neutral <small>Small Hole</small>	14-8	14-4	12-8	12-4
Equip. Grnd.	12-8	12-2	12-8	12-2

MODEL NUMBER	REPLACEMENT PARTS		CABINET SIZE	ENCLOSURE STYLE page 91	CABINET DIMENSIONS			KNOCKOUT FIGURE page 91
	METER SOCKET	POST LUGS			HEIGHT	WIDTH	DEPTH	
					A	B	C	
U075CTL010	—	—	9 X 17	A	17-3/8"	9-3/4"	5-3/16"	2

FIG.	UL	LUG TYPE	MODEL NUMBER	RECEPTACLES	CIRCUIT PROTECTION	AMP	VOLTS	WIRE RANGE*	CABINET SIZE	HUB OPENING	LOAD & NEUTRAL BAR	UNIT WT.	STD. PKG.
E	Y	LOOP FEED	U075CTL010	14-50R BR32U 5-20R2GFI	CB250, CB130 CB120 SPACE CB120	100	120/240	W	9 x 17	Y	LC55N1T	16	1